



PRODUCT MODEL
SELECTOR

WILL NUMBER SEARCH

CHECK STOCK ✓

PRODUCT GUIDE

DESIGN GUIDE

AVAILABLE SERIES
OF PROTECTORS

• CATALOG LIBRARY

• APPLICATIONS

• DESIGN
CONSIDERATIONS

• CATALOG LIBRARY
• AVAILABLE SERIES
• DESIGN GUIDE

• GLOSSARY

CATALOG LIBRARY

CONTACT US & MAP

• TERMS OF USE

• RETURN

COMP. OF REGISTER

PRODUCT MODEL SELECTOR

Parameter Search

Part Number Search

Search Criteria

Select

Reset

Select required parameters below. Click "Select" to get links to the product that match your criteria.

Agency [?] :	<input type="text"/>	Land Style [?] :	<input type="text" value="No preference"/>
Approvals [?] :	<input type="text" value="UL 14700 certified"/> <input type="text" value="UL 189 listed"/> <input type="text" value="UL 409A listed"/> <input type="text" value="UL recognized"/> <input type="text" value="ET compliant"/> <input type="text" value="CSA certified"/>	Max. interrupting Capacity [?] :	<input type="text" value="No preference"/>
(CSA Certs to desktop)		Poles [?] :	<input type="text" value="No preference"/>
Dimensions [?] :	<input type="text" value="No preference"/>	Terminal Type [?] :	<input type="text" value="No preference"/>
		Max. Volts AC [?] :	<input type="text" value="No preference"/>
		Max. Volts DC [?] :	<input type="text" value="No preference"/>

Optionally you can enter additional keywords below to narrow your search.

Keywords [?]

Figure 1

PRODUCT MODEL SELECTOR

Parameter Search

Part Number Search

Search Criteria

Select required parameters below. Click "Search" to get links to the product that match your criteria.

Amps [?] : Approvals [?] : <i>(Click OK/OK to deselect)</i>	<div> <div>USA certified</div> <div>CUR recognized</div> <div>UL-PRF-3E019</div> <div>UL-41PP-4-H211</div> <div>TUV approved</div> <div>VDE approved</div> </div>	Handle Size [?] : <input type="text" value="Terminal Block"/> Max. Interrupting Capacity [?] : <input type="text" value="500"/> Poles [?] : <input type="text" value="-- No preference --"/> Terminal Type [?] : <input type="text" value="-- No preference --"/> Max. Vrms AC [?] : <input type="text" value="-- No preference --"/> Max. Vrms DC [?] : <input type="text" value="-- No preference --"/> Dimensions [?] : <input type="text" value="-- No preference --"/>
---	--	--

Optionally you can enter additional keywords below to narrow your search.

Keywords [?]

Figure 2

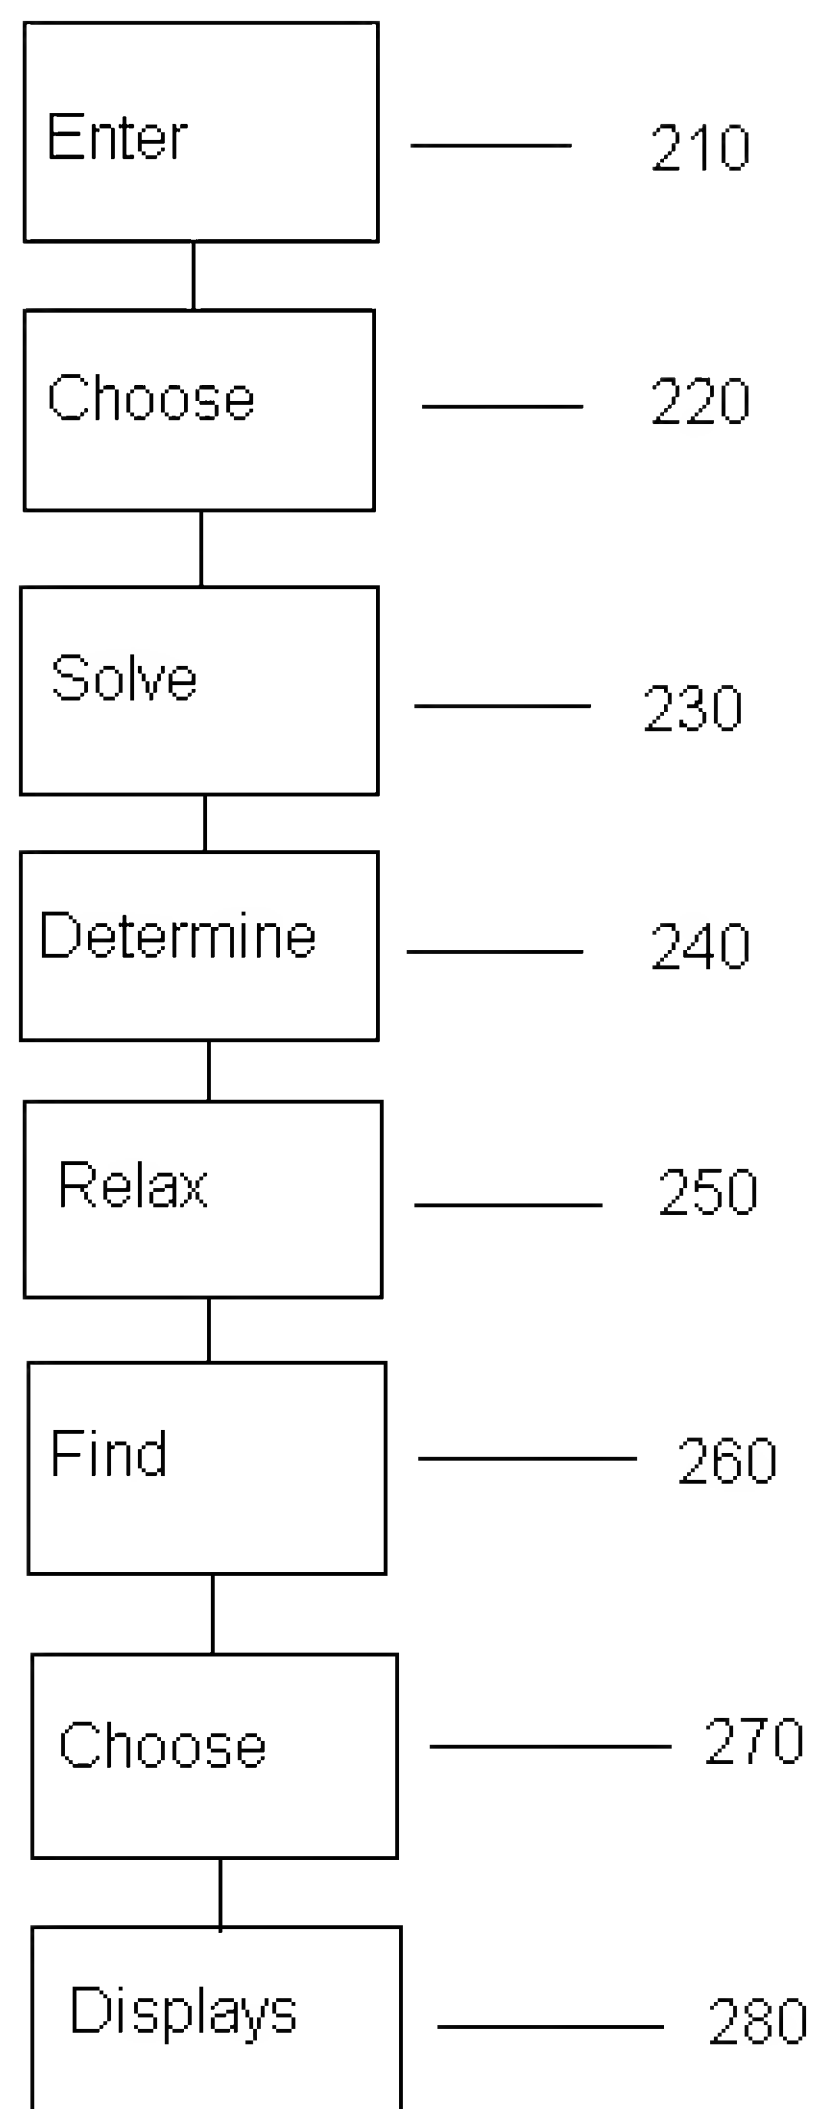


Figure 3a

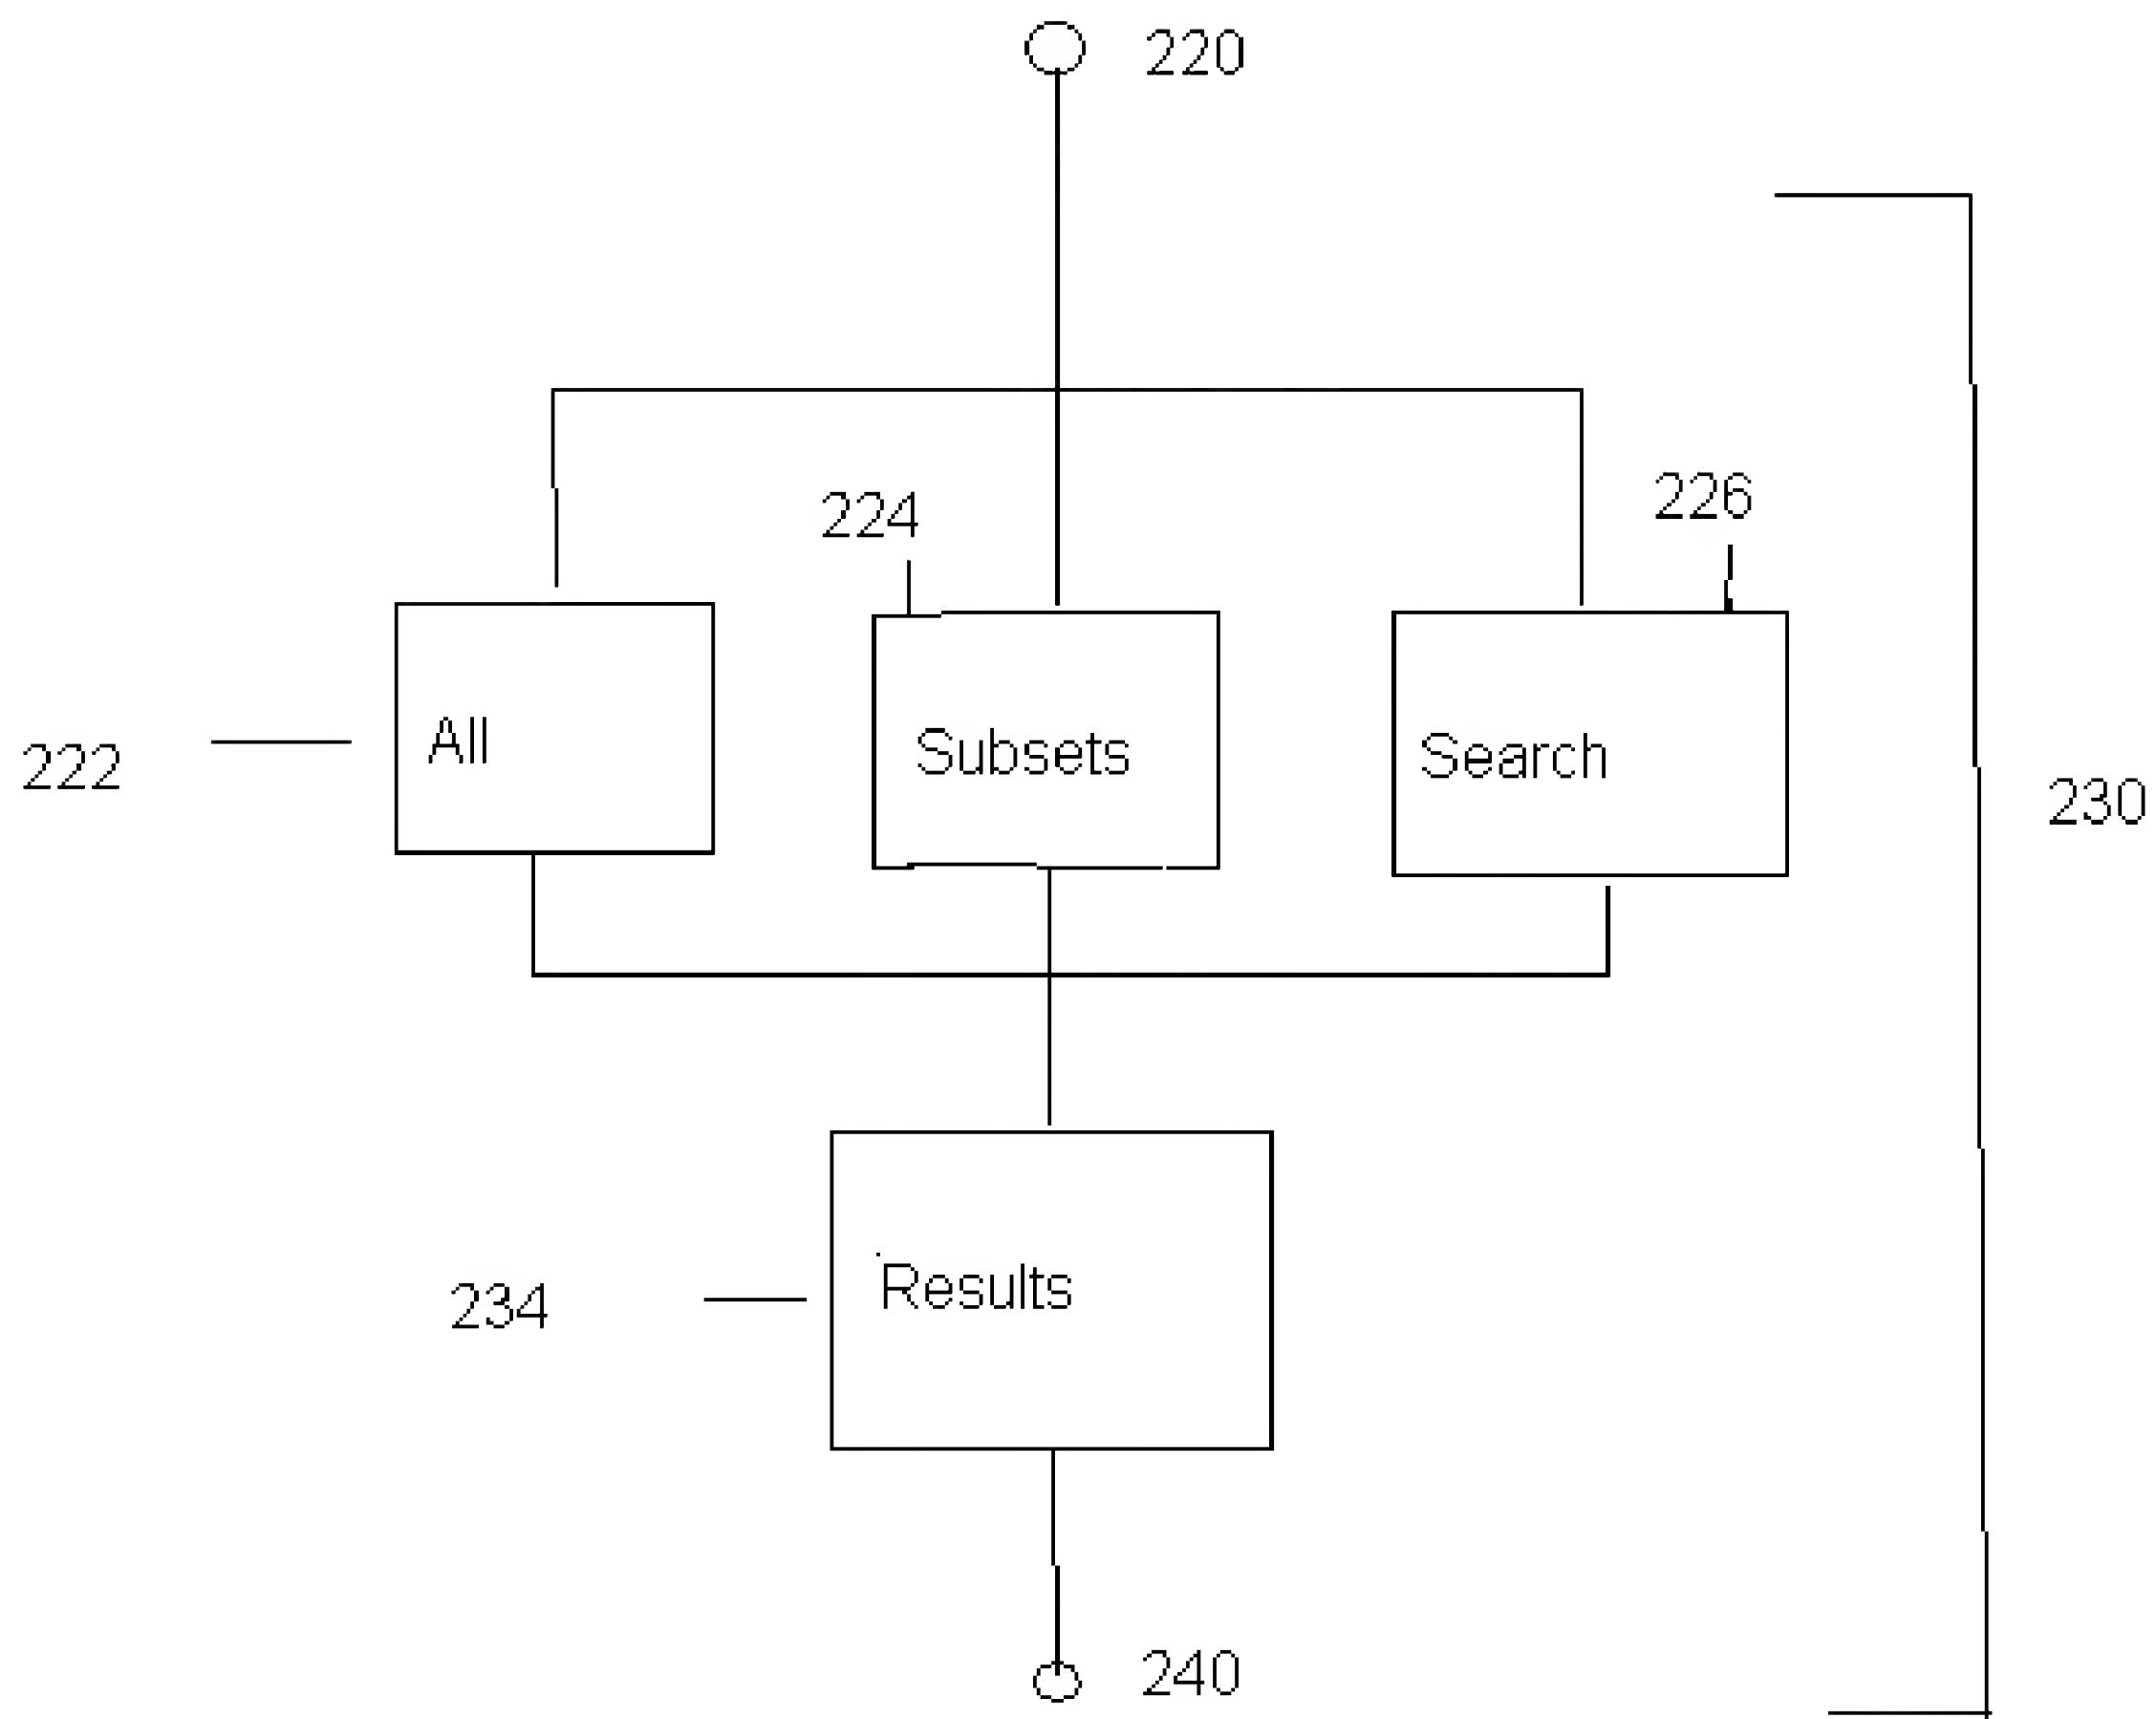


Figure 3b



PRODUCT FAMILY SELECTION

PART NUMBER SEARCH

CHECK STOCK 

PRODUCT GUIDE

DESIGN GUIDE

- 1. AIRPAX NEW PRODUCTS
- 2. AIRPAX INFORMATION
- 3. CONFIGURATION
- 4. APPLICATIONS
- 5. DESIGN CONSIDERATIONS
- 6. CONSIDERATIONS FOR THIS AIRPAX POWER SYSTEM FAMILY
- 7. GLOSSARY

CATALOG LIBRARY

CONTACT US & PARTS

- 1. TERMS OF USE
- 2. PRIVACY

LOGIN OR REGISTER

AIRPAX

Power Protection Products

POWER PROTECTION PRODUCTS MAINPAGE

NEWS

EMPLOYMENT

AIRPAX CORPORATION MAIN PAGE

EXCLUSIVE DISTRIBUTORS

Search

Reset

Select required parameters below. Click "Search" to get links to the product that match your criteria.

Airpax ?

JL 1500 certified

▲

JL 48L listed

▼

JL 48EA listed

▼

JL recognized

▼

CE compliant

▼

CSA certified

▼

Handle Style ?

Diminished Rocker

▼

Max Interrupting Capacity ?

50000

▼

Apparatus ?
(CIRCUIT Breaker to be selected)

5000

▼

Terminal Type ?

-- No preference --

▼

Max Volts AC ?

No preference

▼

Dimensions ?

No preference

▼

Max Volts DC ?

-- No preference --

▼

Optionally you can enter additional Keywords below to narrow your search.

Keywords ?

41 Words ▼



Searching using only "Max Interrupting Capacity, Apparatus" produced these results.

Click on the product description to link to the product configuration page.

Compare Selected Products




JL1500 Toggle Handle

Airpax type JL150L/EJ15LE circuit breakers are available in a wide variety of configurations, including no series, series with auxiliary switch, shunt and relay with choice of delays and ratings in DC and/or 50/60-Hz or 60-Hz versions.




JL48L Rocker Handle

Airpax type JL48L/EJ48LE circuit breakers are available in a wide variety of configurations, including no series, series with auxiliary switch, shunt and relay with choice of delays and ratings in DC and/or 50/60-Hz or 60-Hz versions.

Figure 4



PRODUCT MATCH
SELECTOR

PART NUMBER SEARCH

CHECK STOCK ✓

PRODUCT GUIDE

OPEN A RING

AVAILABLE CHOICES
BY PRODUCT TYPE

CONNECTIONS

APPLICATIONS

SYSTEM
CONSIDERATIONS

INFORMATION FOR
THE INTERNATIONAL MARKET

BLOG/ART

CATALOG LIBRARY

CONTACT US & MAPS

TERMS OF USE

SITE MAP

LOGIN OR REGISTER

Parameter Search

Part Number Search

Search Criteria

Search | Reset

Select required parameters below. Click "Search" to get links to the product that match your criteria.

Amcs ?

LL 1570 certified ▲

LL 48E listed

LL 48EA listed

LL recognized

UL compliant

CSA certified ▼

Handle Style ? : Illuminated Rocker ▼

Max. Interrupting Capacity ? : 50000 ▼

Exhs ? : No preference ▼

Terminal Type ? : -- No preference -- ▼

Max. Volts AC ? : -- No preference -- ▼

Max. Volts DC ? : -- No preference -- ▼

Approvals ?
(Click on link to specs/sec)

Dimensions ? : -- No preference -- ▼

Optionally you can enter additional Keywords below to narrow your search.

Keywords ? | All Words ▼

No Results found for this search. Similar Searches found results below:

Handle Style: <i>Illuminated Rocker</i>	▼		
Approvals: <i>ULF approved</i>	▼	▼	▼
Max. Interrupting Capacity: 50000		▼	▼
Click for Results:	1	2	13



PRODUCT FAMILY SELECTION

PART NUMBER SEARCH

CHECK STOCK 

PRODUCT GUIDE

DESIGN SLIDE

1. AIRPAX NEW PRODUCTS

2. AIRPAX INFORMATION

3. CONFIGURATION

4. APPLICATIONS

5. DESIGN CONSIDERATIONS

6. CONSIDERATIONS FOR THIS AIRPAX POWER SYSTEM FAMILY

7. GLOSSARY

CATALOG LIBRARY

CONTACT US & PARTS

1. TERMS OF USE

2. PRIVACY

LOGIN OR REGISTER

AIRPAX

Power Protection Products

POWER PROTECTION PRODUCTS MAINPAGE

NEWS

EMPLOYMENT

AIRPAX CORPORATION MAIN PAGE

SALES REPRESENTATIVES

Search

Reset

Select required parameters below. Click "Search" to get links to the product that match your criteria.

Airps ?

JL 1500 certified

JL 48L listed

JL 48EA listed

JL recognized

CE compliant

CSA certified

Handle Style ?

Diminished Rocker

Max Interrupting Capacity ?

50000

Apparatus ?

(Circuit Breaker to be selected)

Max. Volts AC ?

No preference

Terminal Type ?

No preference

Max. Volts DC ?

No preference

Dimensions ?

No preference

Max. Volts DC ?

No preference

Optionally you can enter additional Keywords below to narrow your search.

Keywords ?

4 Words

 Searching using only "Max. Interrupting Capacity, Apparatus" produced these results.
Click on the product description to link to the product configuration page.

Compare Selected Products





JL1500 Toggle Handle

Airpax type JL150L/EJ15LE circuit breakers are available in a wide variety of configurations, including series series with auxiliary switch, shunt and relay with choice of delays and ratings in DC and/or 50/60-Hz or 60-Hz versions.





JL48L Rocker Handle

Airpax type JL48L/EJ48LE circuit breakers are available in a wide variety of configurations, including series series with auxiliary switch, shunt and relay with choice of delays and ratings in DC and/or 50/60-Hz or 60-Hz versions.

Figure 6